

Freedom 360°^{Series}

Pressurized Shake Freezer with Mix Transfer System

Model 78RMT

At only 18" wide, this space saving shake machine will dispense an "old fashioned hand made" shake without the added labor. This high volume shake freezer mixes the flavor into the shake product as it is dispensed from the spigot. The fast easy way to serve flavors regardless of the viscosity of the syrup or the fruit pulp it contains. You may also order the freezer without the spindle mixer for dispensing single flavor shakes.

Special Features

Mix Transfer System*

Exclusively from Electro Freeze, the revolutionary mix transfer system has only eleven parts to disassemble and clean, resulting in tremendous savings in time, effort and labor costs. Reap all the benefits of a pressurized system with the cleaning time of a gravity fed freezer.

Refrigeration

2 HP 12,000 BTU refrigeration system for high capacity and quick recovery. Friendly to the environment, these models use R404A refrigerant.

Refrigerated Mix Cabinet

Located in the lower portion of the freezer, the refrigerated mix cabinet provides easy access for filling mix reservoirs. Pump directly from the mix bag or fill the mix containers, insert the mix tube from each mix transfer system and that's it --- you're ready to make product.

Dispensing Head

...finest insulating material available...no frost, no drip. Easy pull down handle with adjustable dispensing speed.

Beater Blades

Plastic, durable and long wearing...energy efficient.

Mix Level Indicator

The mix level indicator features a flashing light to alert the operator when mix is needed.




Model 78RMT

* U.S. Patent #5,349,825

ELECTRO FREEZE®

Plumbing & Electrical Connections

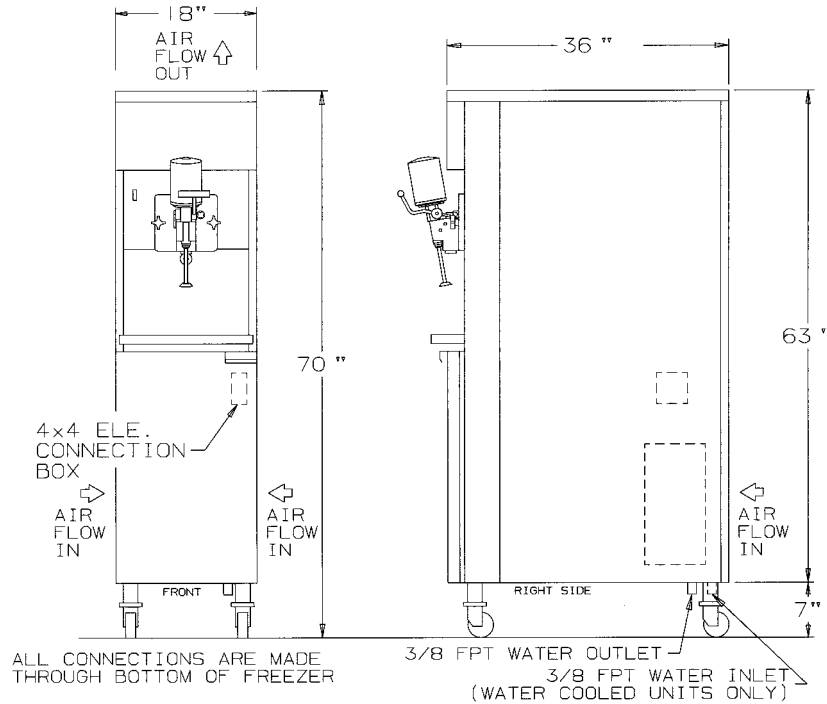

ALL CONNECTIONS
ARE MADE THROUGH
BOTTOM OF FREEZER

Model 78RMT

SPECIFICATIONS

All specifications subject to change without notice. Check name plate for exact electrical data.

MODEL NO.	MOTOR		DIMENSIONS			NET WT.	TOTAL AMPS			
	Beater	Compressor	D.	W.	H.		1 Phase Water	1 Phase Air	3 Phase Water	3 Phase Air
78RMT	1.5 HP	2 H.P. 12,000 BTU	36" 91 cm	18" 46 cm	70" 178 cm	520 LB 236 KG	19.1	21.3	13.4	15.6
MODEL							MINIMUM CIRCUIT AMPACITY			
78 RMT							21.5	23.5	15	17

Available self contained air or water cooled.

Standard wiring-230 volts A.C., 60 HZ, Single Phase - 3 Wire - Neutral required

208 Or 230 volts A.C., 60 HZ, Three Phase - 4 Wire - Neutral required

Electrical characteristics other than above available on request from Sales Office.

Authorized Distributor

MIX CABINET DIMENSIONS			
Model	D.	W.	H.
78RMT	17"	14.1"	26.7"
	43.2 CM	36.9 CM	67.8 CM

division of H.C. DUKE & SON, INC.

2116 - 8th Avenue • East Moline, Illinois 61244

Phone (309) 755-4553 • (800)755-4545

Fax (309) 755-9858

E-mail: sales@electrofreeze.com • www.electrofreeze.com

Certified and/or listed by:



*Listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-M91