

Batch Freezer

Model B12
Model B24

Serve Ice Cream, Low Overrun Gourmet Ice Cream, Gelato, Sorbet, Italian Ice, Water Ice or Sherberts - you can make and serve the best with Electro Freeze Batch Freezers.

Special Features

- Single large cylinder
- Single speed
- Unique cylinder design
- Cam door latch provides quick interior access
- Extraction results in minimal flavor overlap
- Built-in faucet with flex hose for fast and easy cleaning
- Digital timer with audible alarm
- Adjustable torque control for automatic operation/shutdown




Model B12
Model B24

Electro Freeze... Quality since 1929. See our complete line of frozen treat machines, including Soft Serve, Shake, Slush, Batch, Yogurt, Custard, Whipped Cream, Granita and Arctic Swirl Flavor Blender. Because we give you a choice!

ELECTRO FREEZE®

Plumbing & Electrical Connections

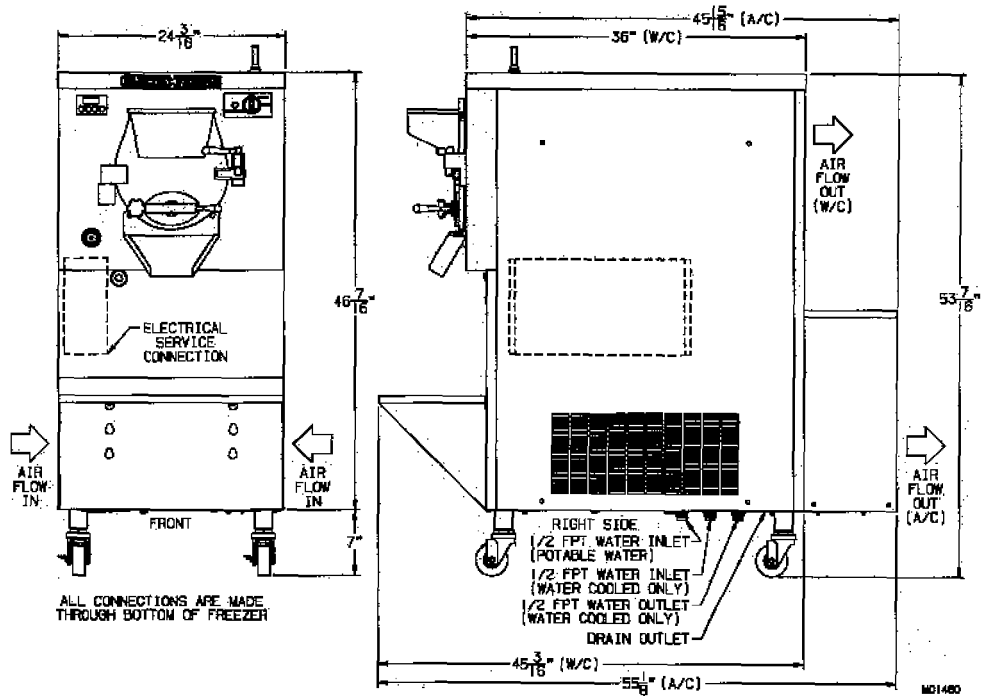

Model B12
Model B24

SPECIFICATIONS

All specifications subject to change without notice.

MODEL NO.	MOTOR H.P.		DIMENSIONS			NET WT.	TOTAL AMPS			
	Beater	Compressor	D.	W.	H.		1 Phase Water	1 Phase Air	3 Phase Water	3 Phase Air
B12	2	2	36" 91.4 CM	24 3/16" 61.4 CM	53 7/16" 135.7 CM	655 LB. 297 KG	22.4	23.8	15.3	16.7
B24	3	3	*36" 91.4 CM	24 3/16" 61.4 CM	53 7/16" 135.7 CM	790 LB. 358 KG	34	35.4	20.1	21.5
MODEL		MINIMUM WIRE AMPACITY								
B12		26.0 A.	27.5 A.	17.5 A.	19.0 A.					
B24		38.5 A.	40.0 A.	23.0 A.	24.5 A.					

*Depth of B24 Air Cooled is 46" (116.7 CM).

Refrigerant: R404a

Water or Air Cooled.

Standard Wiring—208/230 volt, 60 HZ, Single Phase—2 wire
208/230 volt, 60 HZ, Three Phase—3 wire

Electrical characteristics other than above available on request from Sales Office.

Freezing Cylinder Capacity: B12 - 14 Quarts
B24 - 25 Quarts

Authorized Distributor

division of H.C. DUKE & SON, INC.

2116 - 8th Avenue • East Moline, Illinois 61244
Phone (309) 755-4553 • (800)755-4545
Fax (309) 755-9858
E-mail: sales@electrofreeze.com • www.electrofreeze.com

Certified and/or listed by:



*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-M91