

SLIM LINE SERIES

TWIST GRAVITY FREEZER

Model SL500

The slim line model SL500 will dispense two separate flavors or an equal combination of both flavors. High quality frozen treats from low-fat, nonfat, sugar free ice cream to yogurt, custard and sorbet. This exclusive Electro Freeze design is simple to operate and easy to clean.

Unique Features

Dispensing Head

Made of the finest insulating materials. Self closing positive displacement dispensing handles.

Freezing Cylinders

Two 3.7 quart (3.5 liter) cylinders, 11,000 Btuh compressor permits fast freeze down, quick recovery and increased production.

Two 16-Quart Mix Hoppers

Separate hopper refrigeration maintains mix below 41°F (5°C) during auto and night mode operation.

Beater Blades

Durable, long wearing, nonreversible blades.

Night Switch

Provides safe controlled refrigeration of product during night or any nonbusiness period...reduced energy consumption...maintains product quality.

Mix Level Indicator

Flashing light automatically tells operator when mix is needed.

Experience Tells

Electro Freeze has over 75 years of experience manufacturing quality frozen treat machines. This is evident in the superior engineering, sturdy construction, quality craftsman and dependable performance of every Electro Freeze freezer. Backed by a nationwide distributor network.




Model SL500

Sweet Choice![™]

ELECTRO FREEZE

ELECTRO FREEZE®

PLUMBING AND ELECTRICAL CONNECTIONS

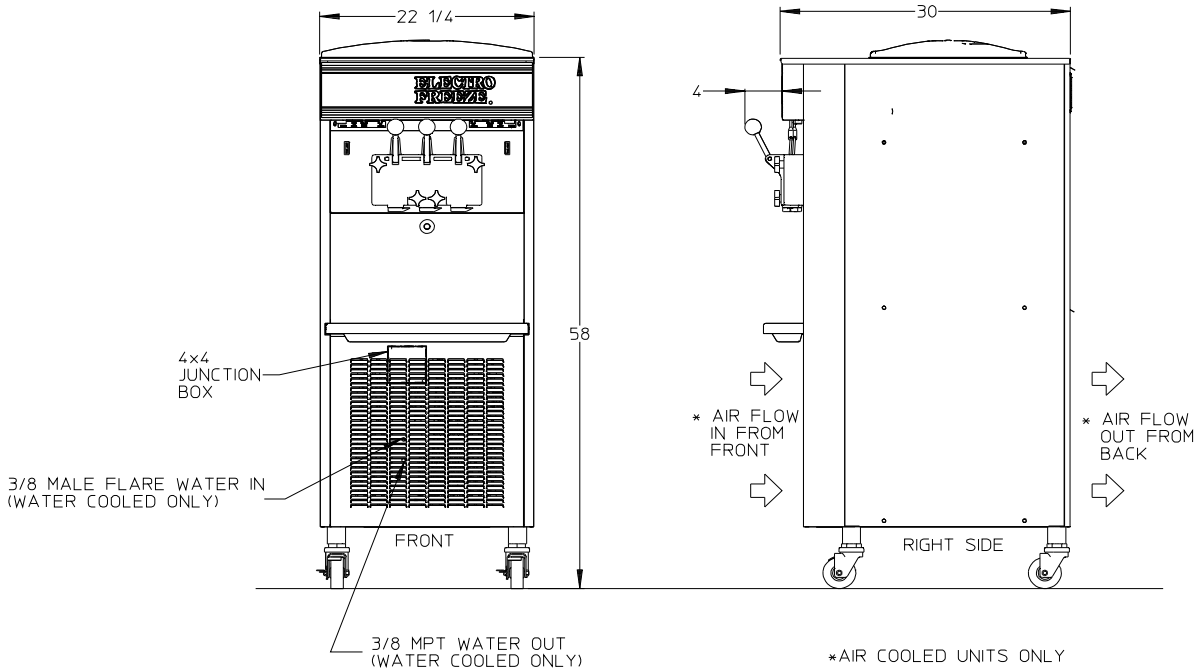

MODEL SL500

SPECIFICATIONS

All Specifications subject to change without notice. Check nameplate for exact electrical data.

MODEL NO.	MOTOR		DIMENSIONS			NET WEIGHT	TOTAL AMPS			
	Beater	Compressor Cylinder	D.	W.	H.		1 Phase Water	1 Phase Air	3 Phase Water	3 Phase Air
SL500	Two 2 hp	11,000 Btuh 2.0 hp	30" 76 cm	22.25 56.5 cm	58" 147 cm	546 lb 248 kg	29.8	31.1	22.0	23.3
		Compressor Hopper					MINIMUM CIRCUIT AMPS			
		500 Btuh 1/10 hp					32.5	34.0	24.0	25.5
							MAX FUSE SIZE/HACR CIRCUIT BREAKER			
							40	40	30	30

6" air space required behind rear panel for proper air circulation.
 Air or water cooled self contained.
 One dedicated electrical connection required.
 Wiring: 208/230 volt, 60 Hz, 1 phase, 2 wire
 208/230 volt, 60 Hz, 3 phase, 3 wire
 Electrical characteristics other than above available on request from sales office.
 Refrigerant : cylinder 404a; hopper 134a
 Mix Hopper Capacity: two - 16 quarts (15 liters) each
 Freezing Cylinder Capacity: two - 3.7 quarts (3.5 liters) each

Authorized Distributor

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____

Cooling: _____

Options: _____

division of H.C. DUKE & SON, INC.

2116-8th Avenue, East Moline, Illinois 61244
 Phone (309) 755-4553 • (800) 755-4545
 FAX (309) 755-9858
 E-mail: sales@electrofreeze.com • www. electrofreeze.com

184273 Printed in U.S.A. 5/10

Certified and/or listed by:



*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-M91